

6/10 Watt-IN-WALL/Hollow-Space WUL-270-DC for AB-Lines



W
U
L


270
DC

I
N
W
A
L
L

L
O
U
D
S
P
E
A
K
E
R

- SUITABLE FOR **HOLLOW-SPACE & IN-WALL-MOUNTING**
- **NO LOSS OF 50% OF THE MEMBRANE-SURFACE** IN FAILURE-CASE
- IN CASE OF BREAKDOWN OF ONE LINE, CONTINUOUS FUNCTION OF THE SECOND
- **TWO AUTONOMOUS** VOICE-COILS PER SYSTEM
- LOUDSPEAKER-PROTECTION THROUGH **SPECIAL VOICE-COIL-WINDINGS**
- **50-WATT-PEAK-POWER-RATING** PER VOICE-COIL
- IN CASE OF HEAT-OVERLOAD OF ONE VOICE-COIL, CONTINUOUS FUNCTION OF THE SECOND VOICE-COIL
- **TWO AUTONOMOUS** 100-VOLT-TRANSFORMER PER SYSTEM
- **NO PHASE-SHIFT** ON THE MEMBRANE-SURFACE
- **50-HZ-STABLE** 100-V-TRANSFORMERS
- OPTIONAL CERAMIC-CONNECTING-CLAMP & THERMO-FUSE AVAILABLE

| TECHNICAL DATA: | WUL-270-DC/6W | WUL-270-DC/10WATT |
|-----------------|---------------------------|---------------------------|
| Loudspeaker: | 5" / 2 x 15W with HF-Cone | 5" / 2 x 15W with HF-Cone |
| 100-V-Taps: | 2 x 100V-6-3-1.5W | 2 x 100V-10-5-2,5W |
| FO-Range: | 80-16 000 Hz | 80-16 000 Hz |
| SPL 1W/1m: | 95 dB | 95 dB |
| SPL 6W/1m: | 103 dB | 105 dB |
| Dimensions: | 270 x 181 x 79 mm | 270 x 181 x 79 mm |
| Weight: | 1,6 Kg | 1,8 Kg |
| Material: | ABS | ABS |
| Colour: | white | white |

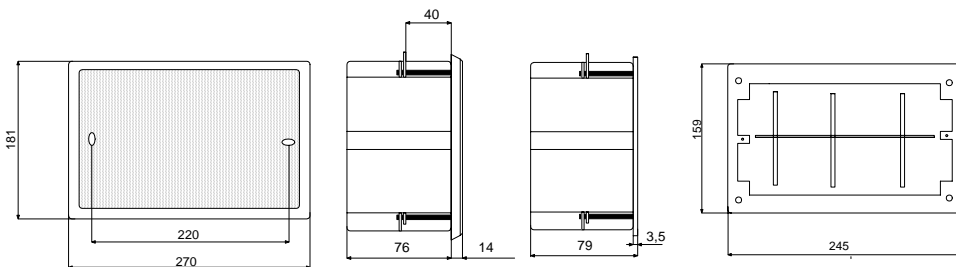

wall-cut-out for hollow-space-mounting 234 x 149 mm

DUAL
CONE