


6W/100V-CEILING-LOUDSPEAKER ADVANTAGE-130/160

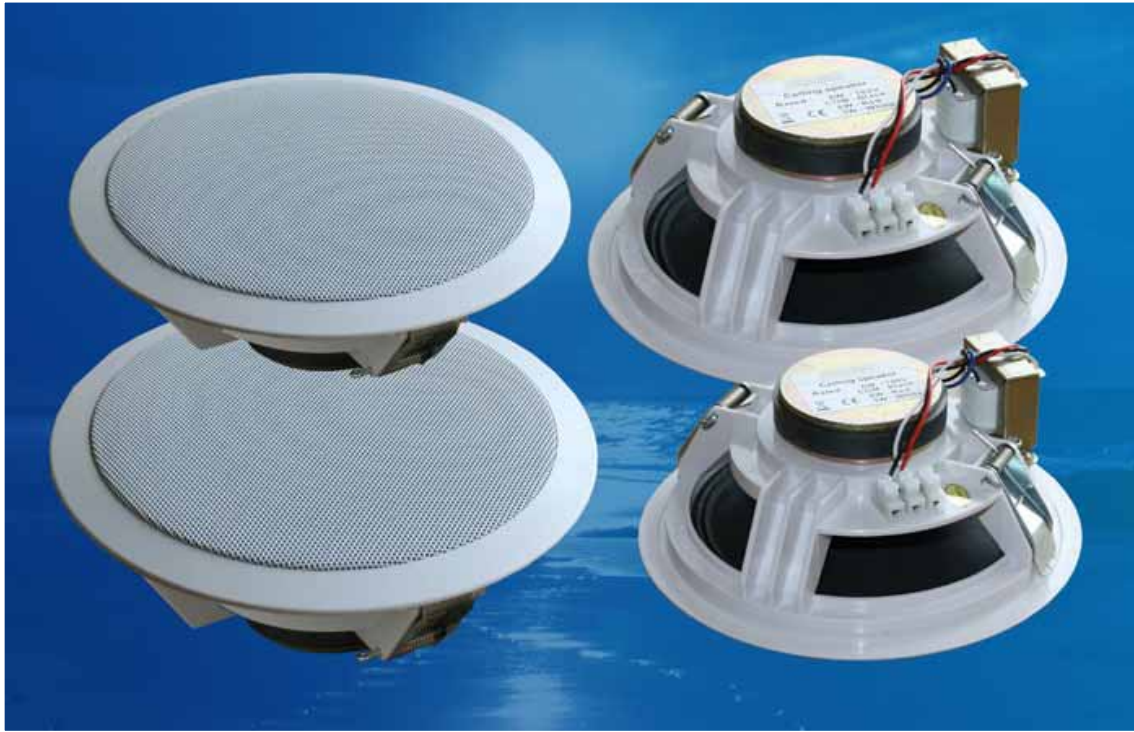

A
D
V
A
N
T
A
G
E

130

160

C
E
I
L
I
N
G

L
O
U
D
S
P
E
A
K
E
R

- **HIGH SPL-LEVEL** THROUGHOUT ALL SPEECH-FREQUENCIES
- 95dB 1W/1M / 99dB PEAK (2KHz/6,5")
- RADIATION 180° (6,5"/100Hz-1,7KHz)
- **EASE & ULYSSES-DATA** AVAILABLE (6,5")
- **QUICK MOUNTING** THROUGH 2 FAST-INSTALLATION-SPRINGS
- **TOUCH-PROTECTED** 100-V-CONNECTING-CLAMP
- HIGHLY **STABLE** ABS-MOUNTING-RING / **LOW FLAMMABILITY**
- POWDER-COATED **METAL-FRONT-GRILL**
- **MINIMUM MOUNTING-DEPTH** (55/70-MM)

TECHNICAL DATA:	ADVANTAGE-130	ADVANTAGE-160
Loudspeaker:	6/10W 130-mm-broadband	10/15W 165-mm-broadband
Power-Consumption:	100V-6-3-W	100V-6-3-W
Frequency-Range:	80-16 000 Hz	70-19 000 Hz
SPL 1W/1m:	94 dB	95 dB / 99dB-2KHz
SPL 6W/1m:	102 dB	103 dB / 107dB-2KHz
Radiation:	180° (bis 1,5 kHz)	180° (bis 1,7 kHz)
Dimensions:	175 mm x 55 mm	188 mm x 70 mm
Ceiling-Cutout:	148 mm	168 mm
Weighth:	0,5 Kg	0,7 Kg
Colour:	white	white

