


6/12W bi-directional-aluminium-sound-projector Lamprodyn-130/bi

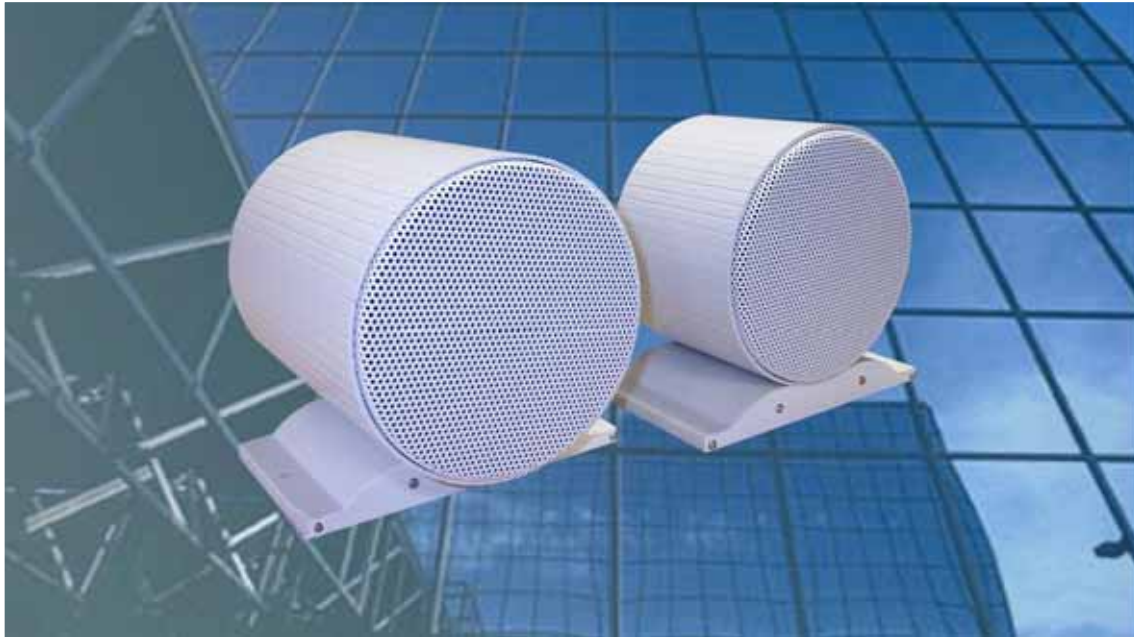

L
A
M
P
R
O
D
Y
N

130
bi

6W

12W

B
I
D
I
R
E
C
T
I
O
N
A
L

- FIRE-RESISTANT/PROTECTED
- AGELESS FORM-STABLE-ALUMINIUM-CABINET
- 50-HZ-STABLE 100-V-TRANSFORMER
- SPEECH & MUSIC-OPTIMIZED LOUDSPEAKER-QUALITY
- HUMIDITY-PROTECTED
- PROTECTION-DEGREE IP-55
- SIMILAR CUSTOM-SIZE & CHROME-PLATED VERSIONS AVAILABLE

TECHNICAL DATA:

LAMPRODYN 130BI/6W

LAMPRODYN 130BI/12W

Loudspeaker:	1 x 15W/120mm-Broadband	2 x 12W Broadband with HF-Conus
Power Consumption:	100V-6-3-1,5-0,75W	100V-12-6-3-1,5W
Frequency-Range:	80-15 000 Hz	70-16 000 Hz
SPL 1W/1m:	95 dB	95 dB x 2
SPL 6W/1m:	103 dB	103 dB x 2
Radiation:	360°	360°
Dimensions:	146 x 100 mm	146 x 186 mm
Socket-Width:	175 mm	175 mm
Weight:	1,9 Kg	3,2 Kg
Colour:	white	white

