

# 6/10W-in-wall/hollow-space-loudspeaker WUL-270G in ABS-plastic



W  
U  
L  
  
270G

6  
W  
-  
10  
W

I  
N  
W  
A  
L  
L  
  
L  
O  
U  
D  
S  
P  
E  
A  
K  
E  
R


- SUITABLE FOR **HOLLOW-SPACE & IN-WALL-MOUNTING**
- **HOLLOW-SPACE-CABINET** IN DELIVERY **INCLUDED**
- MOUNTING LIKE USUAL HOLLOW-SPACE-BOX VIA 4 SCREWS
- LOUDSPEAKER-BAFFLE MOUNTED THROUGH 2 SCREWS
- VERY **FAST MOUNTING** THROUGH **QUICK-SNAP-FRONT-GRILL**
- HIGHLY **STABLE** ABS-CABINET OF VERY LOW **FLAMMABILITY**
- **50-HZ-STABLE** 100-V-TRANSFORMER
- POWER-SAVING THROUGH HIGH **SOUND-PREASURE-LEVEL**
- **VOLUME-CONTROL & 24-V-RELAY** INCL. ASSEMBLING OBTAINABLE
- **2-WAY-VERSIONS** AVAILABLE

## TECHNICAL DATA:

### WUL-270G/6WATT

### WUL-270G/10WATT

Loudspeaker:	12W-130mm broadband with HF-dome	12W-130mm broadband with HF-dome
Power-Consumption:	100V-6-3-1.5W	100V-10-5-2.5W
FO-Range:	70-17 000 Hz	70-17 000 Hz
SPL 1W/1m:	94 dB	94 dB
SPL 6W/1m:	102 dB	104 dB
Radiation:	180 ° (1 kHz)	180 ° (1 kHz)
Dimensions:	270 x 181 x 79 mm	270 x 181 x 79 mm
Weight:	1,3 Kg	1,4 Kg
Colour:	white	white

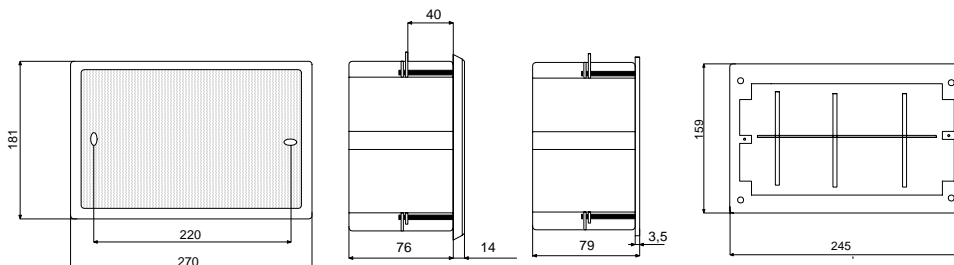

wall-cut-out for hollow-space-mounting 234 x 149 mm