


# CLB-180-DUAL-CONE & DLS-180-DUAL-CONE for A/B-SYSTEM-LINES

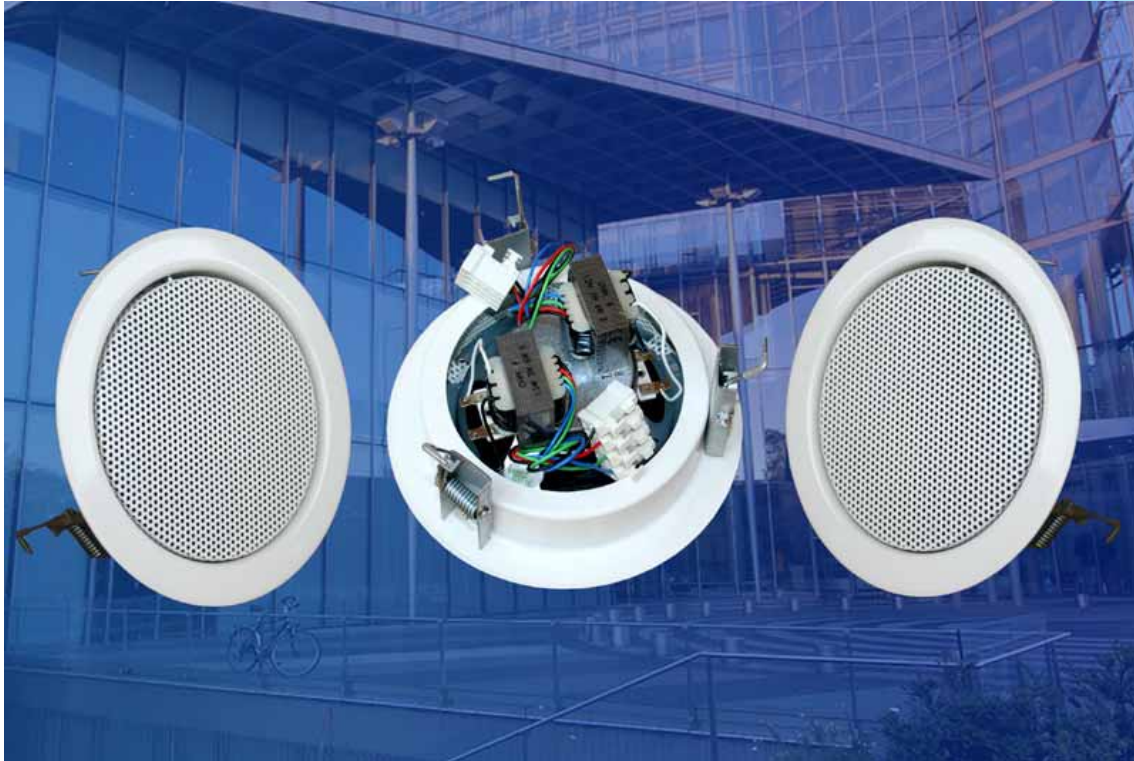

CLB  
180  
DUAL  
CONE  
  
DLS  
180  
DUAL  
CONE

- **NO LOSS OF 50% OF THE MEMBRANE-SURFACE IN FAILURE-CASE**
- IN CASE OF BREAKDOWN OF ONE LINE, CONTINUOUS FUNCTION OF THE SECOND
- **TWO AUTONOMOUS VOICE-COILS PER SYSTEM**
- **TWO AUTONOMOUS 100-VOLT-TRANSFORMER PER SYSTEM**
- LOUDSPEAKER-PROTECTION THROUGH **SPECIAL VOICE-COIL-WINDINGS**
- **50-WATT-PEAK-POWER-RATING PER VOICE-COIL**
- IN CASE OF HEAT-OVERLOAD OF ONE VOICE-COIL, CONTINUOUS FUNCTION OF THE SECOND VOICE-COIL
- **NO PHASE-SHIFT ON THE MEMBRANE-SURFACE**
- OPTIONAL CERAMIC-CONNECTING-CLAMP & THERMO-FUSE AVAILABLE
- OPTIONAL **10-W / FIRE-DOME / CUSTOM-COLOUR** AVAILABLE

A / B

S  
Y  
S  
T  
E  
M  
  
L  
I  
N  
E  
S

TECHNICAL DATA:	CLB-180-DC	DLS-180-DC
Loudspeaker:	5" / 2 x 15W with HF-Cone	5" / 2 x 15W with HF-Cone
100-V-Taps:	2 x 100V-6-3-1.5W	2 x 100V-6-3-1.5W
FQ-Range:	80-17 000 Hz	80-17 000 Hz
SPL 1W/1m:	95 dB	95 dB
SPL 6W/1m:	103 dB	103 dB
Dimensions:	180 mm x 80 mm	180 mm x 80 mm
Ceiling-Cutout:	165 mm	165 mm
Weight:	1,4 Kg	1,4 Kg
Material:	Metal	Metal
Colour:	white	RAL 9010
optional 100-Volt:	2 x 100V-10-5-2,5W	2 x 100V-10-5-2,5W

