
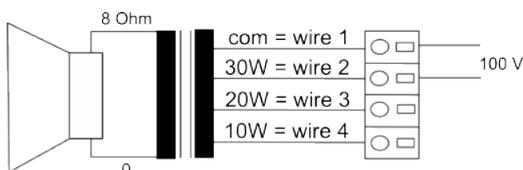
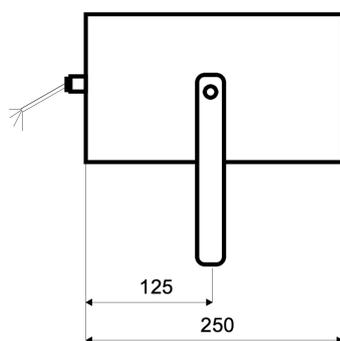


LA-200-808WT/EN5424

EN 54-24 Projector-Speaker for Outdoor Use
in ALU with 30 Watt Power and 2-Way - Technology

EN
54-24

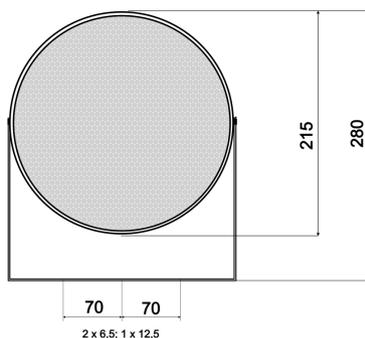

TECHNICAL DATA

LA-200-808WT/EN5424





Loudspeaker:	8" - E-Sonic-808 - 2-Way
Power-Consumption:	100V-30-20-10W
Frequency-Range:	60-20 000 Hz
EN-Sensitivity 1W/4M:	82,2 dB
SPL max 30W/4M:	98,7 dB
SPL 1W/1M max. EASE/Ulysses:	103 dB (2,2 kHz)
SPL 30W/1M max. EASE/Ulysses:	117 dB (2,2 kHz)
Radiation H (0,5/1/2/4KHz):	335°/236°/67°/34°
Radiation V (0,5/1/2/4KHz):	335°/236°/67°/34°
EN degree:	EN Type B, weather-proof, outdoor-certificated
Dimension:	215 x 250 mm
Weight:	3,5 kg
Material:	ALU
Color:	RAL 9010
Certificate-Nr.:	1293-CPD-0363
Order-Nr.:	LA-200-808WT/EN5424

- Very High Quality Sound for Music & Speech and very High SPL
- Weather-proof through ALU-Case, -Grill, -Bracket & Stainless Steel Screws
- Additional rain-protection through custom-rain-roof
- Three 100V-tappings with junction box
- Custom colors optional
- Special DIN 912-ISO 4762 screws
- Ceramic clamp & thermal fuse by request

LA-200-808WT/EN5424

EN 54-24 Projector-Speaker for Outdoor Use
in ALU with 30 Watt Power and 2-Way - Technology

Radiation

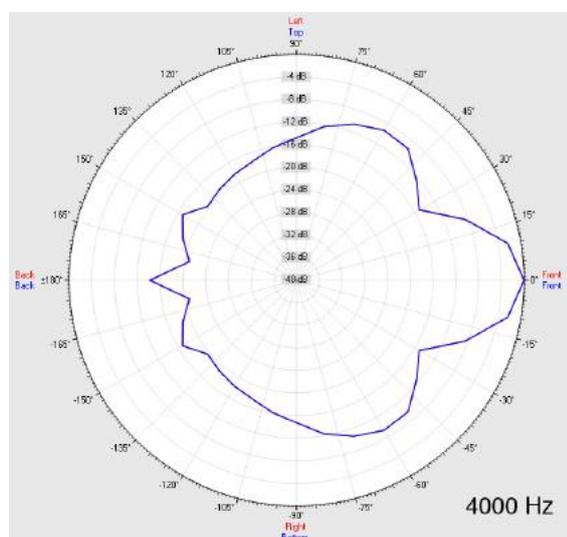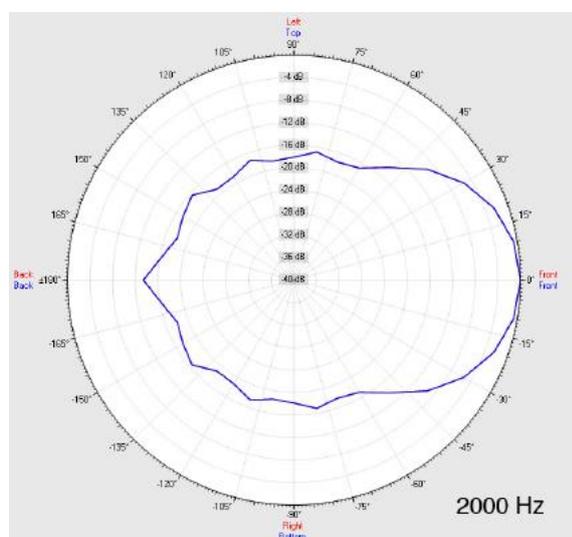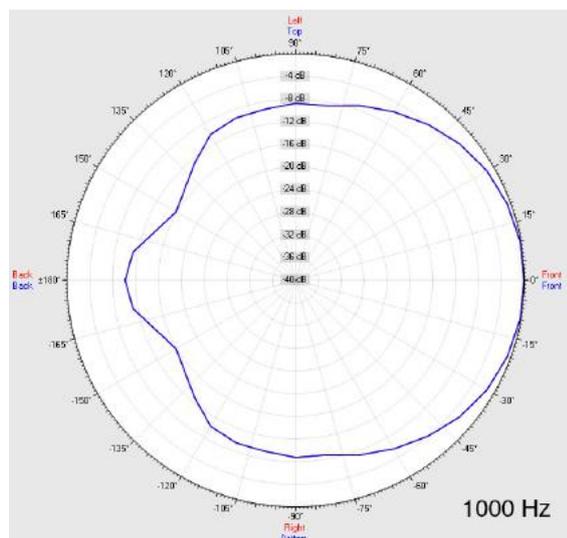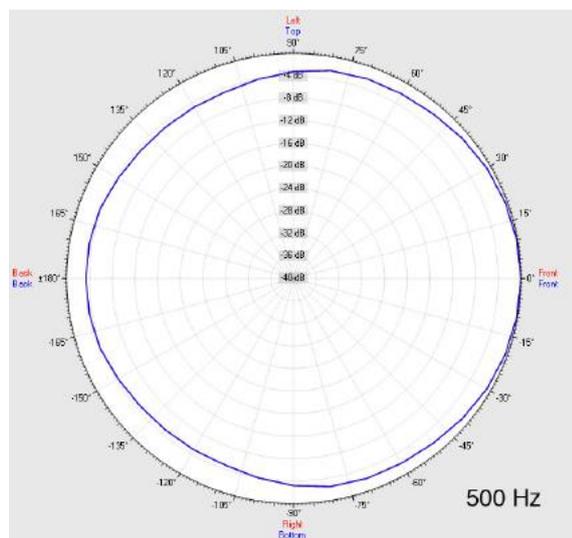


Test method	Axis	500 Hz	1000 Hz	2000 Hz	4000 Hz
EN 54-24	HOR	335°	236°	67°	34°
EN 54-24	VER	335°	236°	67°	34°
EASE/Ulysses	HOR	360°	120°	65°	35°
EASE/Ulysses	VER	360°	120°	65°	35°

LA-200-808WT/EN5424

EN 54-24 Projector-Speaker for Outdoor Use
in ALU with 30 Watt Power and 2-Way - Technology

Isobar-Diagramm

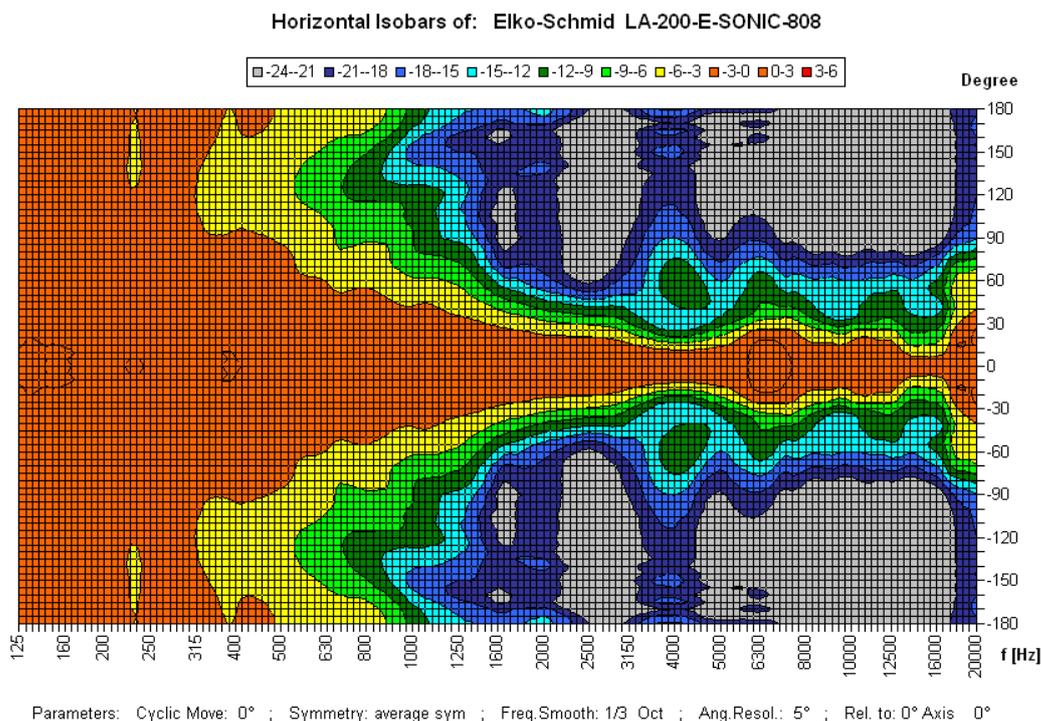

CE

1293

Elko Schmid GmbH & Co. KG
Glauchauer Str. 30, D-08058 Zwickau

13

DoP: 498058129314-OWS-PN-0019

EN 54-24

Loudspeaker for voice alarm systems for
fire detection and fire alarm systems for buildings

LA-200-808WT/EN5424

Intended Option:
Type B